


Angular gear Ket-Bee 200X TxC-Gearbox


Blind hollow shaft and solid shaft in synchronization

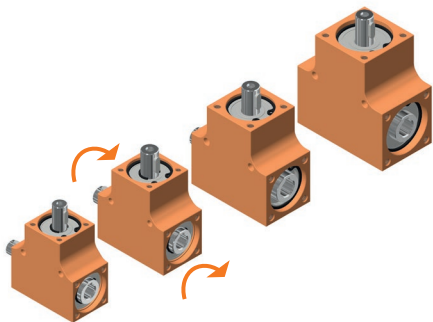

A bevel gearbox family consisting of 4 sizes for versatile use as an angular gearbox.
The gearbox is characterised by a compact design with maximum torque, sturdiness and smooth power transmission. Simple screw fastening enables uncomplicated installation

Besondere Merkmale

- Combination: Blind hollow shaft and solid shaft in synchronisation
- Maintenance-free and silent running thanks to hardened steel bevel gears
- Aluminium housing, anodized
- Ratio 1:1
- Permitted operating temp. -20°C to +60°C
- Backlash at drive shaft 3° ± 1°
- Duty cycle 20 % at 5 min (1 min ON, 4 min OFF)
- Lifetime of 1000 hours with:
 - full load and
 - input speed of 500 rpm and
 - duty cycle 20% with 5 min

Ket-Bee	T-Gearbox													
														
	Max. torque (Speed dependent)													
2006.00-	1.5 bis 8	Nm	□32 mm	56 mm										
2007.00-	2 bis 10	Nm	□35 mm	60 mm										
2008.00-	2.5 bis 12	Nm	□40 mm	68 mm										
2009.00-	3 bis 14	Nm	□45 mm	77 mm										
Gearbox-type														
T T-gearbox: Continuous shaft														
Housing: Material & Optics														
0 Alu, orange anodized (standard)														
1 Alu, silver anodized														
 * Color according to customer requirements														
Configuration of shaft & direction of rotation														
C X,Z: Solid shaft & blind hollow shaft in Synchronisation Y: Solid shafts with feather key														
Shaft Ø in mm per gearbox-type (Dimension m)														
XX Example: „10“ for 2006.00														
<table><tr><td>m: for 2006</td><td>m: for 2007</td><td>m: for 2008</td><td>m: for 2009</td><td></td></tr><tr><td>10</td><td>12</td><td>12</td><td>12</td><td>mm</td></tr></table>					m: for 2006	m: for 2007	m: for 2008	m: for 2009		10	12	12	12	mm
m: for 2006	m: for 2007	m: for 2008	m: for 2009											
10	12	12	12	mm										
Ratio R														
R1 i = 1:1														
2006.00-	T	0	C	10										
			R1	Example: 2006.00-L0C10R1										


Item.-Nr.	Speed n in rpm	Max. torque M in Nm	Radial- and axial load* F _R in N	F _A in N	Part weight in kg
2006.00-T0C10R1	100/500/1000	8/3/1.5	550	550	0.24
2007.00-T0C12R1	100/500/1000	10/4/2	550	550	0.40
2008.00-T0C12R1	100/500/1000	12/5/2.5	600	600	0.59
2009.00-T0C12R1	100/500/1000	14/6/3	750	750	0.80

* The values of F_R apply only when F_A = 0 N
The values of F_A apply only when F_R = 0 N

Application example

In our Ket-Bee family, we offer gearboxes for a simple 90° deflection (200x L-gearbox) as well as for a splitting of the power transmission to two drives (200x T-gearbox).


Our standard components offer a wide range of options for efficiently implementing drive tasks. Thanks to numerous variants of worm gearboxes from the Ket-Motion series, almost all automation tasks can be mastered with ease.

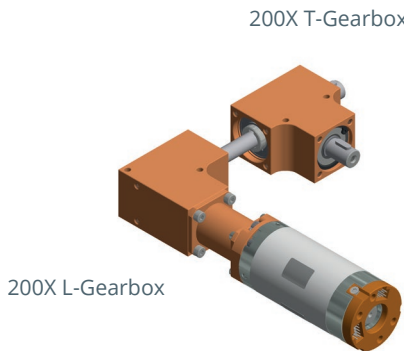


Configuration of shaft & direction of rotation

Gearbox-type 200X.00-TXC

A: X, Y = Solid shaft with feather key, Z= Blind hollow shaft
X, Z = Shafts in synchronisation




Dimensioning general

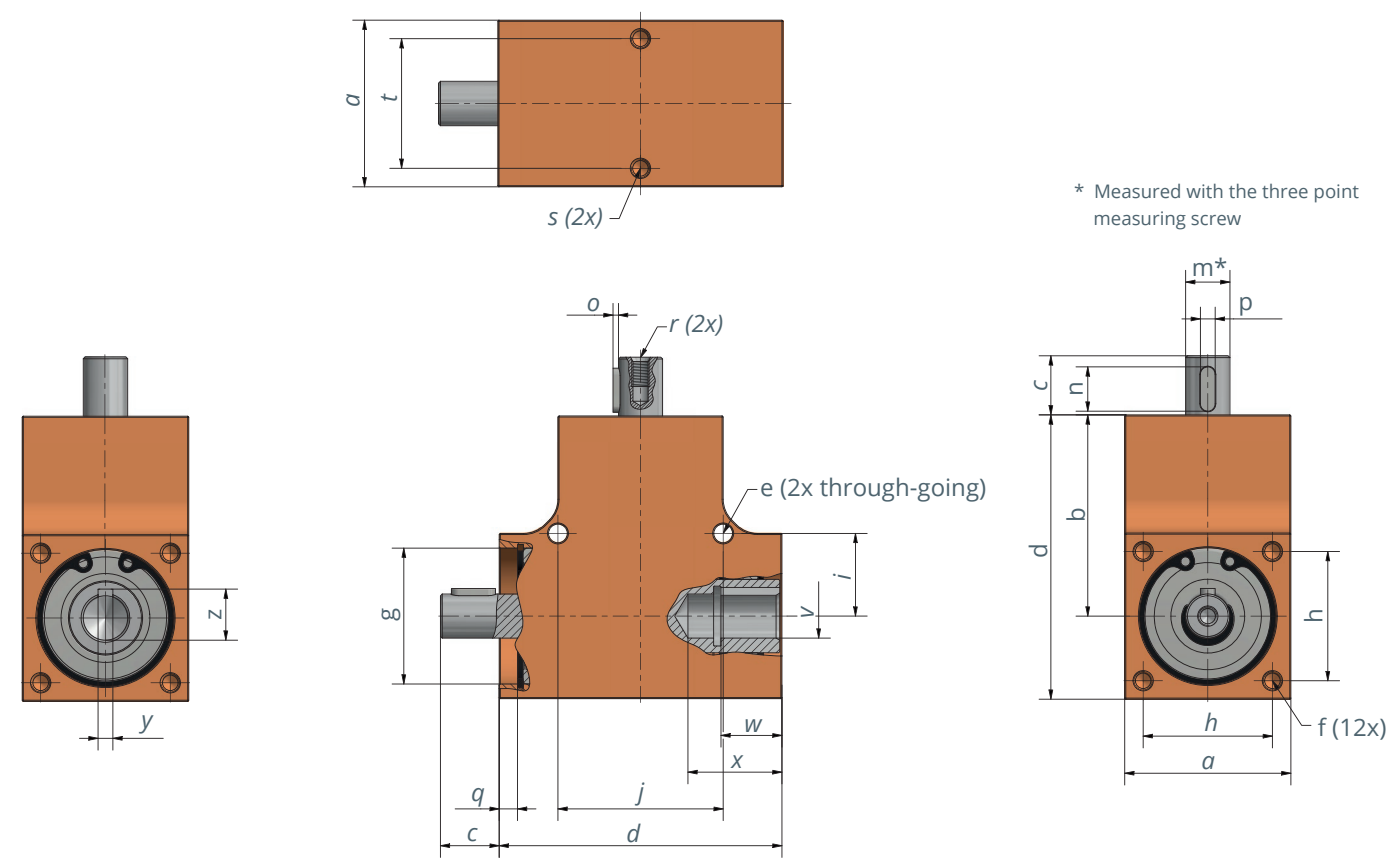

The position of the feather keys is not exactly aligned at 90° in the standard to each other. Possible on request if required.

Gearbox-type	Dimensions in mm											
	a	b	d	e	f	g	h	i	j	q	s	t
2006	4kt32	40	56	ø4.1	M4x10	ø28	24	17	34	2.8	M4x8	24
2007	4kt35	42.5	60	ø4.1	M4x10	ø30	26	17.5	35	3.3	M4x8	26
2008	4kt40	48	68	ø5.1	M5x10	ø32	30	20	40	3.7	M5x10	30
2009	4kt45	54.5	77	ø5.1	M5x10	ø37	35	22.5	45	5	M5x10	35

Dimensioning shaft

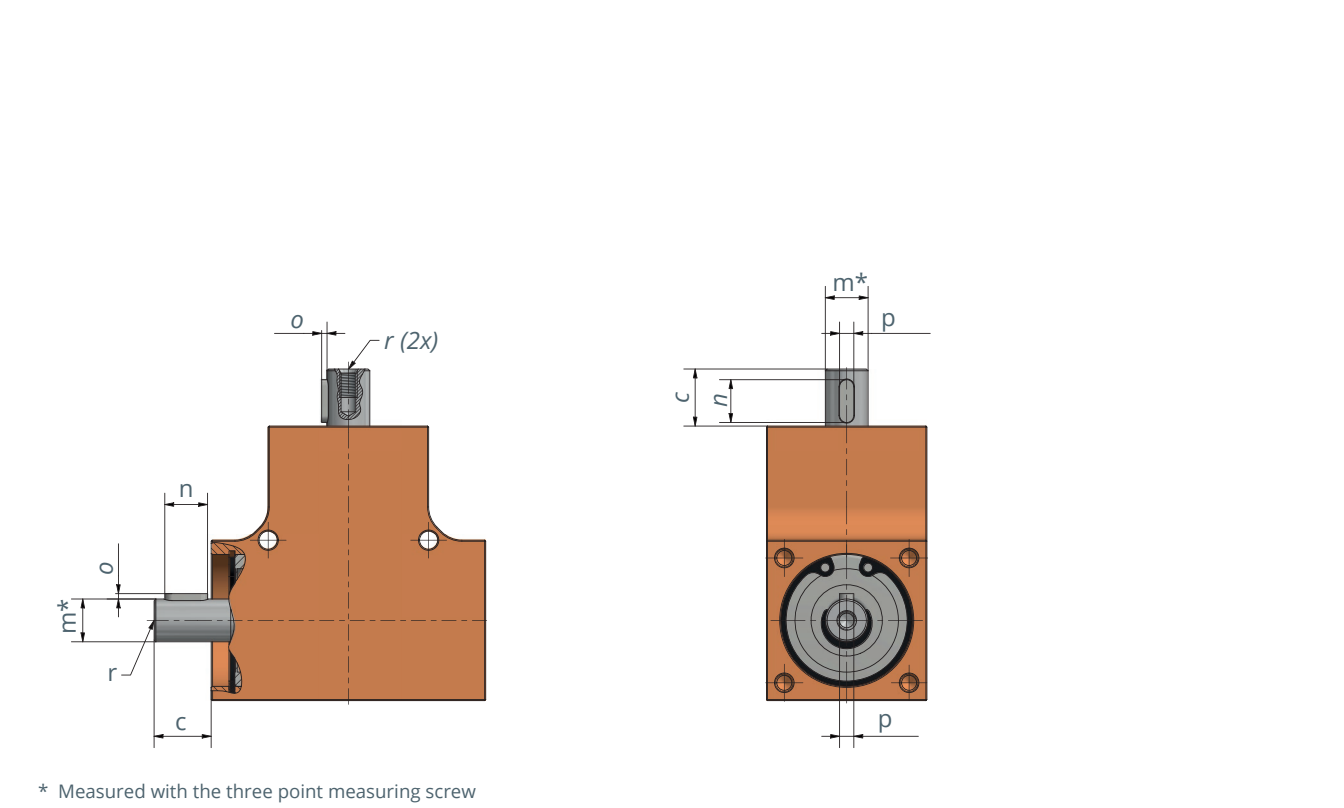

Gearbox-type	ø Shaft	Shaft length	Dimensions featherkey			Threaded hole inside						Item.- Nr.
	m*	c	n	o	p	r	v	w	x	y	z	
2006	ø10j6	16	10	1.2	3	M4x8	ø10H7	0	18.6	4JS9	11.8	2006.00-TOC12R1
2007	ø12j6	16	12	1.5	4	M5x8	ø10H7	0	18.6	4JS9	11.8	2007.00-TOC12R1
2008	ø12j6	16	12	1.5	4	M5x8	ø10H7	14.4	20.5	4JS9	13.8	2008.00-TOC12R1
2009	ø12j6	16	12	1.5	4	M5x8	ø10H7	14.5	20.5	4JS9	13.8	2009.00-TOC12R1